

36EF


Fuse-links 36EF
 Microfuse
 Quick Acting
 F-250V

pluggable into microclip of SL001 or directly mountable on printed circuit boards

Standards and approvals
 EN 60127
 IEC 127-3/3
 DIN-VDE 0820




TYPE DIMENSION



Time current characteristics

Rat. current I_n	$1.5xI_n$		$2.1xI_n$		$2.75xI_n$		$4xI_n$		$10xI_n$
	min.	max.	min.	max.	min.	max.	max.	max.	
continuous	1H	30min	10ms	3s	3ms	300ms		20ms	

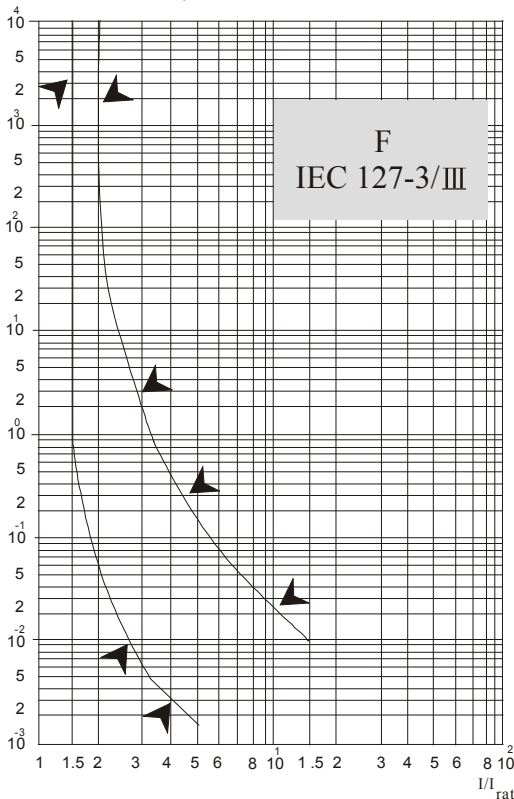

Order No.
 Type:36EF

TYPE	LEAD WIRE	PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV AT I_n	POWER DISSIPATION $1.5xI_n$ mW	MELTING INTEGRAL $10 \times I_n I^2 T$	BREAKING CAPACITY	APPROVAL
36EF	I	P:xx, L:xx	100	250Vac	600	150	3.5×10^{-3}	35A or 10xIn/ 250 V AC	TÜV UL
			125		550	170	7.8×10^{-3}		
			160		500	200	1.4×10^{-2}		
			200		450	220	4.0×10^{-2}		
			250		400	270	9.9×10^{-2}		
			315		400	300	1.0×10^{-1}		
			400		110	150	8.4×10^{-2}		
			500		100	170	9.8×10^{-2}		
			630		100	200	1.3×10^{-1}		
			800		95	250	2.1×10^{-1}		
			1		90	300	3.1×10^{-1}		
			1.25		90	400	7.3×10^{-1}		
			1.6		85	450	8.5×10^{-1}		
			2		85	500	2.1×10^0		
			2.5		75	750	3.5×10^0		
			3.15		70	850	5.9×10^0		
4	65	970	1.1×10^1						
5	60	1000	2.0×10^1						
6.3A	55	1020	3.1×10^1						
8									
10									