




36FG


Fuse-links 36FG
 Microfuse
 FAST ACTING(Normal blow)
 F-125V/250V

pluggable into microclip of SL001 or directly mountable on printed circuit boards(ADE)

Standards and approvals
 UL(Listed) 248-14
 CSA(NRTL/C) 22.2N

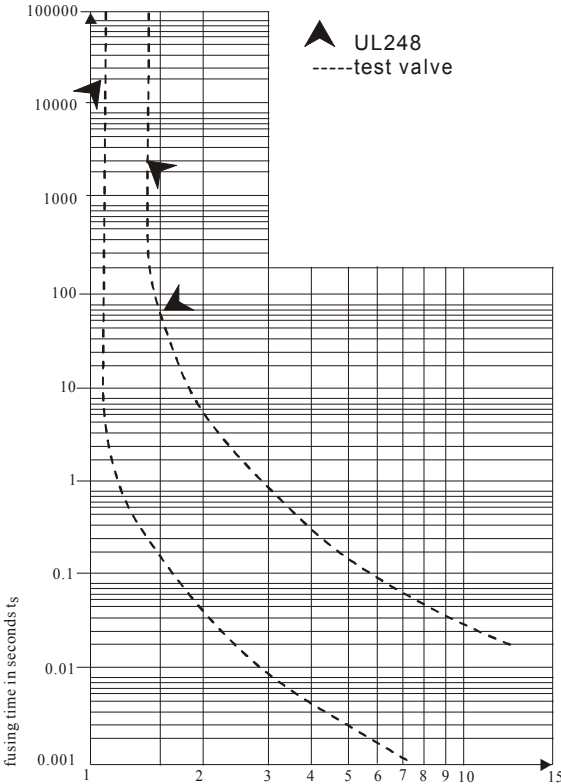

TYPE DIMENSION

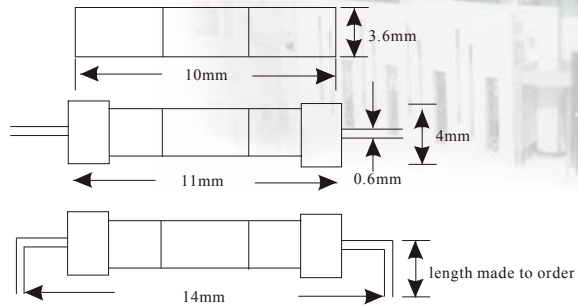

Time current characteristics

Rat. current In	1.1xIn	1.5xIn	2.0xIn
	min.	max.	max.
100mA-6A	4h	10min	5s

Order No.
 Type:36FG

TYPE	LEAD WIRE	FORMING PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV AT In	Fusing I ² t at 10 x In A ² s	BREAKING CAPACITY	APPROVAL	
								CSA	UL
36FG	L	P;xx, L;xx	100mA	125V/250V	1100	4.4x10 ⁻⁴	125Vac 50A. 250Vac 50A.	•	•
			125mA		1000	9.2x10 ⁻⁴		•	•
			150mA		970	8.7x10 ⁻⁴		•	•
			160mA		950	1.7x10 ⁻³		•	•
			180mA		900	1.5x10 ⁻³		•	•
			200mA		850	3.4x10 ⁻³		•	•
			250mA		750	8.0x10 ⁻³		•	•
			300mA		670	1.6x10 ⁻²		•	•
			315mA		650	1.5x10 ⁻²		•	•
			400mA		230	1.9x10 ⁻²		•	•
			500mA		220	2.2x10 ⁻²		•	•
			600mA		210	2.6x10 ⁻²		•	•
			800mA		200	5.5x10 ⁻²		•	•
			1 A		190	7.0x10 ⁻²		•	•
			1.25 A		180	1.1x10 ⁻¹		•	•
			1.5 A		175	2.0x10 ⁻¹		•	•
			1.6 A		170	2.4x10 ⁻¹		•	•
			2 A		160	3.8x10 ⁻¹		•	•
			2.5 A		150	5.7x10 ⁻¹		•	•
			3 A		140	8.2x10 ⁻¹		•	•
3.15 A	136	7.2x10 ⁻¹	•	•					
4 A	130	2.5x10 ⁰	•	•					
5 A	120	3.8x10 ⁰	•	•					
6 A	115	6.4x10 ⁰	•	•					
8 A			•	•					
10 A			•	•					