




37FG


Fuse-links 37FG
 Microfuse
 Medium Breaking Ceramic Microfuse
 Quick Acting F250V

pluggable into micro clip of SL001 or directly mountable on printed circuit boards

Standards and approvals
 EN 60127
 IEC 127-3/3

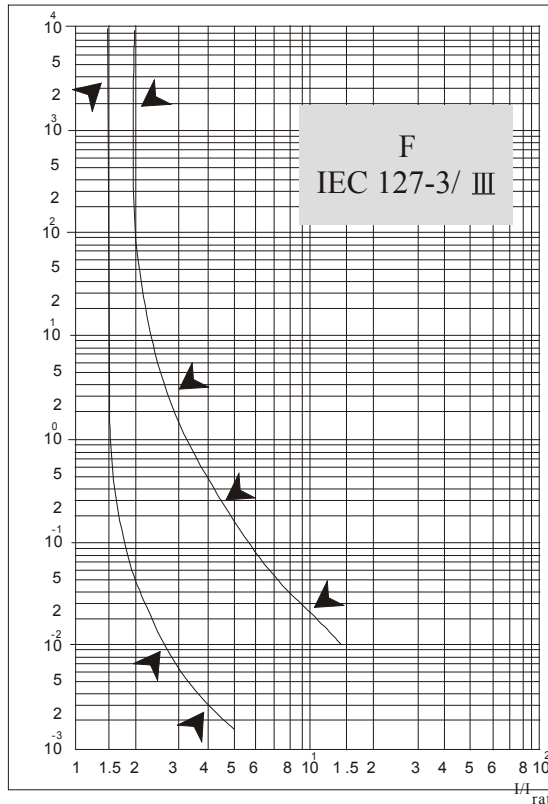

TYPE DIMENSION

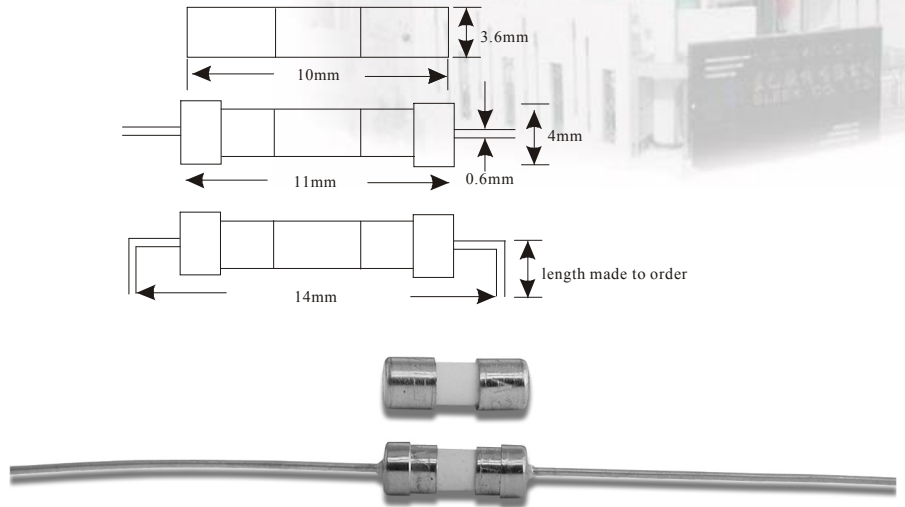

Time current characteristics

Rat. current In	1.5xIn		2.1x In		2.75xIn		4.1xIn		10xIn
	min.	max.	min.	max.	min.	max.	min.	max.	
continuous	1H	30min	10ms	3s	3ms	300ms		20ms	

Order No.
 Type:37FG

TYPE	LEAD WIRE	PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV 1.0 x In	POWER DISSIPATION 1.5xIn mW	MELTING INTEGRAL 10 x In I²T	BREAKING CAPACITY	APPROVAL	
									VDE	UL
37FG	I	P:xx, L:xx	100	250Vac	600	150	4.7x10 ⁻²	200A 250 V AC IEC 127-3/4	○	●
			125		550	170	6.6x10 ⁻²		○	●
			160		500	200	1.4x10 ⁻¹		○	●
			200		450	220	2.0x10 ⁻¹		○	●
			250		400	270	2.8x10 ⁻¹		○	●
			315		400	300	3.6x10 ⁻¹		○	●
			400		110	150	9.0x10 ⁻¹		○	●
			500		100	170	1.3x10 ⁰		○	●
			630		100	200	2.5x10 ⁰		○	●
			800		95	250	3.8x10 ⁰		○	●
			1		90	300	5.5x10 ⁰		○	●
			1.25		90	400	7.9x10 ⁰		○	●
			1.6		85	450	1.4x10 ¹		○	●
			2		85	500	1.7x10 ¹		○	●
			2.5		75	750	2.6x10 ¹		○	●
			3.15		70	850	4.6x10 ¹		○	●
			4		65	970	9.1x10 ¹		○	●
			5		60	1000	9.4x10 ¹		○	●
			6.3A		55	1020	9.5x10 ¹		○	●
			8							
10										