




# 37SG


Fuse-links 37SG  
 Medium Breaking Ceramic Microfuse  
 Time-Lag  
 T-250V

pluggable into microclip of SL001 or directly mountable on printed circuit boards

Standards and approvals  
 EN 60127  
 IEC 127-3/4

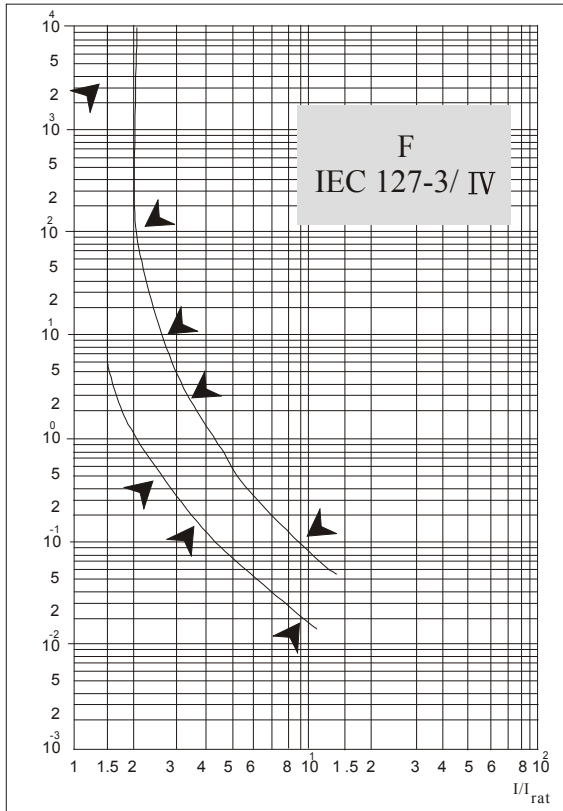

### TYPE DIMENSION

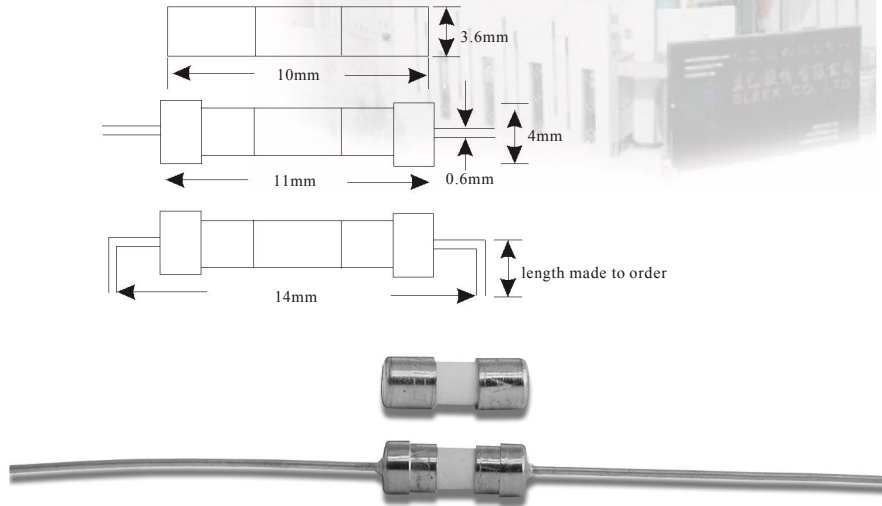

### Time current characteristics

Rat. current $I_n$	$n \times I_n$		$2.75 \times I_n$		$4.1 \times I_n$		$10 \times I_n$	
	min.	max.	min.	max.	min.	max.	min.	max.
continuous	1H	2min	400ms	10s	150ms	3s	20ms	150ms

Order No.  
 Type:37SG

TYPE	LEAD WIRE	PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV $1.0 \times I_n$	POWER DISSIPATION $1.5 \times I_n$ mW	MELTING INTEGRAL $10 \times I_n^2 T$	BREAKING CAPACITY	APPROVAL	
									VDE	UL
37SG	I	P:xx. L:xx	100	250Vac	300	110	$4.7 \times 10^{-2}$	200A	○	●
			125		260	120	$6.6 \times 10^{-2}$		○	●
			160		200	130	$1.4 \times 10^{-1}$		○	●
			200		170	140	$2.0 \times 10^{-1}$		○	●
			250		150	150	$2.8 \times 10^{-1}$		○	●
			315		140	160	$3.6 \times 10^{-1}$		○	●
			400		130	170	$9.0 \times 10^{-1}$		○	●
			500		125	180	$1.3 \times 10^0$		●	●
			630		120	200	$2.5 \times 10^0$		●	●
			800		110	220	$3.8 \times 10^0$		●	●
			1		110	250	$5.5 \times 10^0$		●	●
			1.25		100	300	$7.9 \times 10^0$		●	●
			1.6		100	350	$1.4 \times 10^1$		●	●
			2		100	500	$1.7 \times 10^1$		●	●
			2.5		90	700	$2.6 \times 10^1$		●	●
			3.15		90	900	$4.6 \times 10^1$		●	●
			4		90	1200	$9.1 \times 10^1$		●	●
			5		80	1300	$9.4 \times 10^1$		●	●
6.3A	70	1350	$9.5 \times 10^1$	●	●					
8				●	●					
10				●	●					