




# 50FG

Fuse-links 50FG  
 Miniature Glass Fuse 5x20mm  
 Fast Blow (Quick Acting)  
 F-125V/250V



pluggable into miniature fuse-holder or directly mountable on printed circuit boards

Standards and approvals

UL-248  
 CSA 22.2N

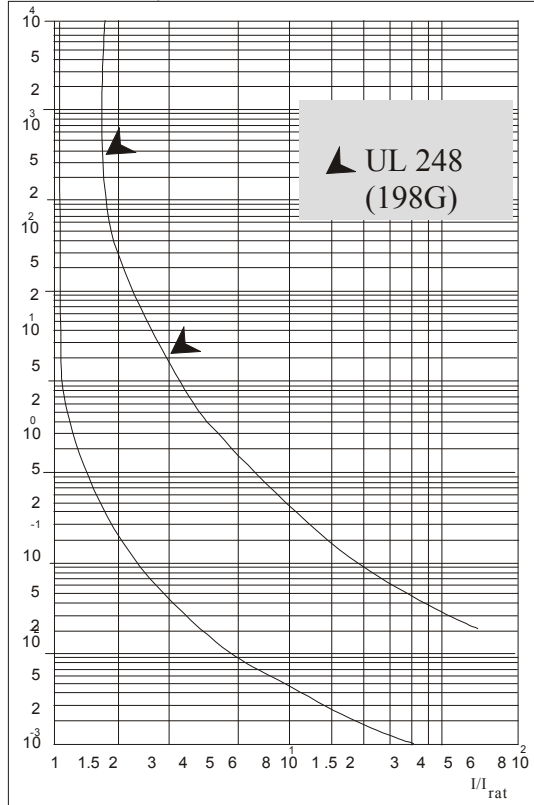

## TYPE DIMENSION

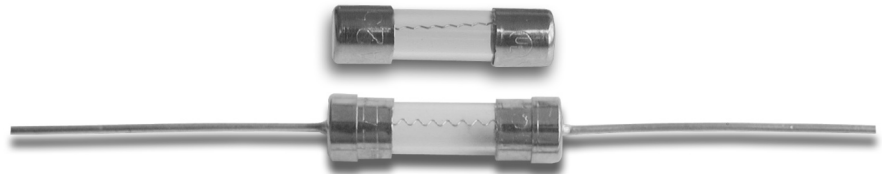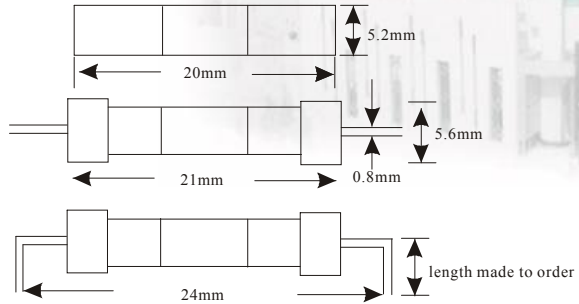

## Time current characteristics

Rat. current $I_n$	$n \times I_n$	1.1x $I_n$	1.35x $I_n$	2.0x $I_n$
100mA-10A		min.	max.	max.
		4h	1h	5s

Order No.  
 Type:50FG

TYPE	LEAD WIRE	FORMING PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV	Fusing $I^2t$ at $10 \times I_n$ $A^2s$	BREAKING CAPACITY	APPROVAL	
								CSA	UL
50FG	L	P:xx, L:xx	100mA	125V/250V	6000	0.0011	125Vac 10KA 250Vac 200A	●	●
			125mA		5400	0.0027		●	●
			150mA		1900	0.0038		●	●
			160mA		4800	0.0069		●	●
			200mA		4000	0.011		●	●
			250mA		3700	0.011		●	●
			300mA		3400	0.02		●	●
			315mA		700	0.038		●	●
			400mA		650	0.11		●	●
			500mA		600	0.19		●	●
			600mA		500	0.38		●	●
			800mA		450	0.45		●	●
			1A		470	1.0		●	●
			1.25A		450	1.8		●	●
			1.5A		400	3.0		●	●
			1.6A		390	3.5		●	●
			1.8A		385	4.5		●	●
			2.0A		380	6.3		●	●
			2.5A		360	11		●	●
			3.0A		340	20		●	●
			3.15A		335	25		●	●
			4A		320	38		●	●
			5A		300	63		●	●
			6A		290	100		●	●
			7A		280	150		●	●
8A	270	300	●	●					
10A	260	350	●	●					
12A			●	●					
13A			●	●					
15A			●	●					