



50SG


Fuse-links 50SG
 Miniature Glass Fuse 5x20mm
 Slow Blow (Time Lag)
 T-125V/250V

pluggable into miniature fuse-holder or directly mountable on printed circuit boards


Standards and approvals

UL-248

CUL

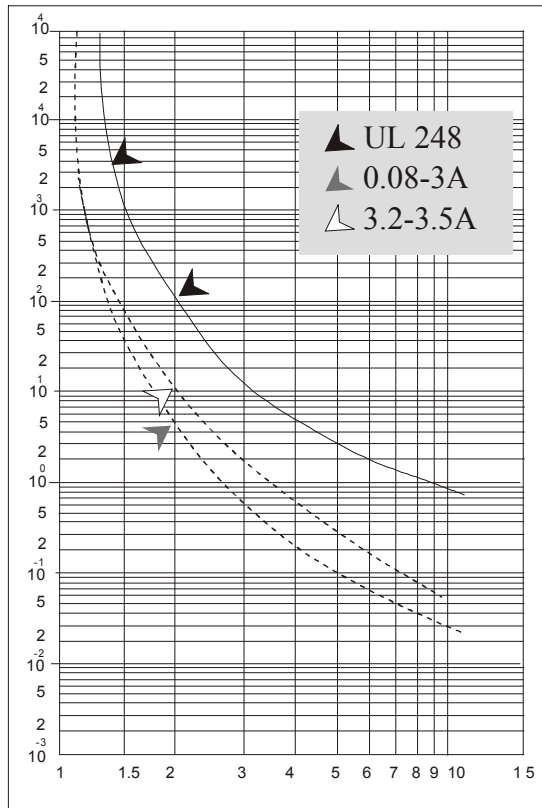

TYPE DIMENSION

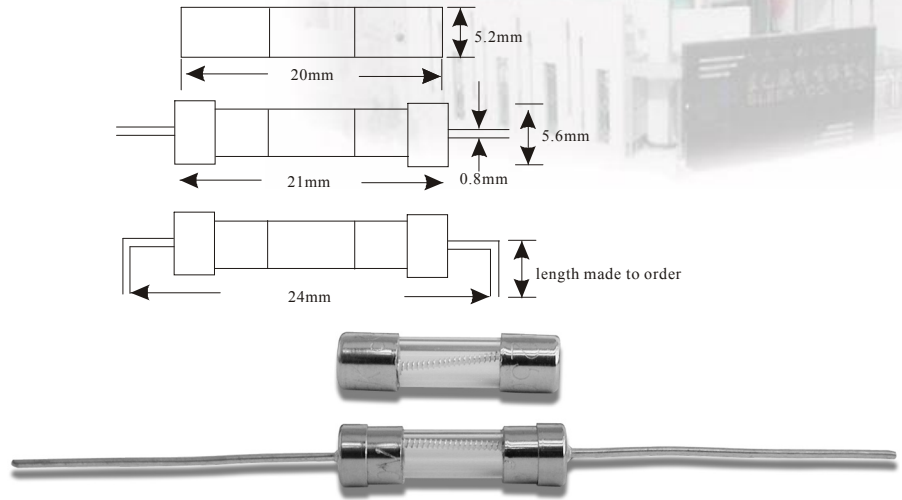

Time current characteristics

Rat. current In	nx In	1.1x In	1.35x In	2.0 In	
		min.	max.	min.	max.
500ma-3A		4h	1h	5s	2min
3.15A-10A		4h	1h	12s	2min

Order No.
 Type:50SG

TYPE	LEAD WIRE	FORMING PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV	Fusing I²t at 10xIn A²s	BREAKING CAPACITY	APPROVAL	
								CUL	UL
50SG	L	P:xx, L:xx	100mA	125V/250V	2400	0.037	125Vac 10KA 250Vac 200A	•	•
			125mA		1800	0.09		•	•
			150mA		1700	0.11		•	•
			160mA		1600	0.12		•	•
			180mA		1500	0.13		•	•
			200mA		1300	0.21		•	•
			250mA		1000	0.25		•	•
			300mA		900	0.54		•	•
			315mA		850	0.6		•	•
			400mA		700	0.83		•	•
			500mA		600	1.5		•	•
			600mA		550	2.7		•	•
			700mA		500	3.9		•	•
			750mA		450	4.2		•	•
			800mA		400	6.2		•	•
			1A		350	11		•	•
			1.25A		300	16		•	•
			1.5A		275	24		•	•
			1.6A		270	26		•	•
			2A		235	48		•	•
2.5A	215	84	•	•					
3.0A	200	110	•	•					
3.15A	190	120	•	•					
4A	160	190	•	•					
5A	135	205	•	•					
6A	150	235	•	•					
7A	187	270	•	•					
8A	205	301	•	•					
10A	235	351	•	•					
12A			•	•					
13A			•	•					
15A			•	•					