




61FG

Fuse-links 61FG
 Miniature Ceramic Fuse 6.35x31.75mm
 Fast Blow(Quick Acting)
 F-125V/250V


Standards and approvals
 UL-248



pluggable into miniature fuse-holder or directly mountable on printed circuit boards

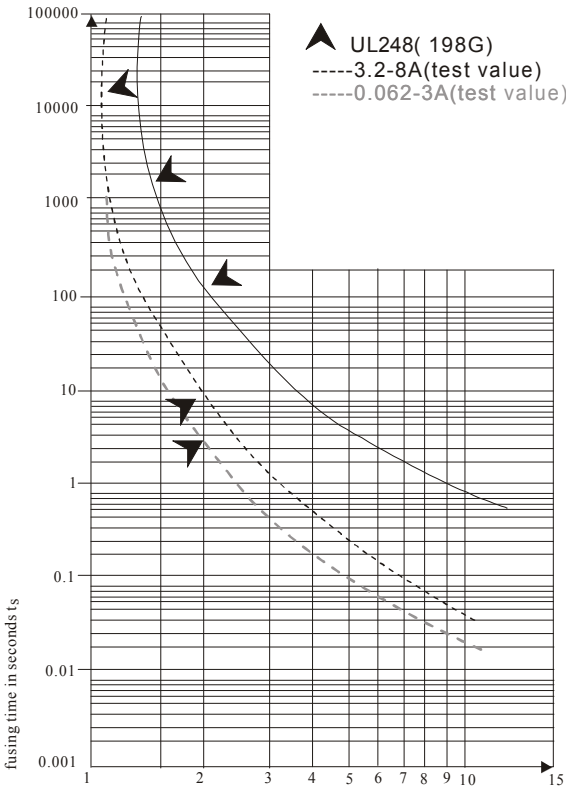

TYPE DIMENSION

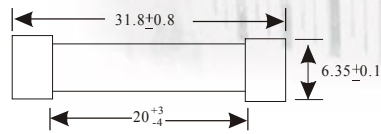

Time current characteristics

Rat. current In	nxIn		
	1.1xIn	1.35xIn	2.0xIn
	min.	max.	max.
	4h	1h	5s

Order No.
 Type:61FG

TYPE	LEAD WIRE	PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV at 1.1In	FUSING I ² T at 10xIn A ² S	BREAKING CAPACITY	APPROVAL
61FG	L	P:xx, L:xx	100mA	125V/250V 125V/250V	6000	0.0011	125Vac 10KA 250Vac 200A	UL
			125mA		5400	0.0023		
			150mA		4900	0.0038		
			175mA		4800	0.0069		
			187mA		4400	0.0088		
			200mA		4000	0.011		
			250mA		3700	0.011		
			300mA		3400	0.020		
			375mA		700	0.038		
			500mA		650	0.11		
			600mA		600	0.19		
			750mA		500	0.38		
			1 A		470	1.0		
			1.25 A		450	1.8		
			1.5 A		400	3.0		
			1.6 A		390	3.5		
			2 A		380	6.3		
			2.5 A		360	11		
			3 A		340	20		
			4 A		320	38		
			5 A		300	63		
			6 A		290	100		
			7 A		280	150		
			8 A		270	200		
10 A	260	350						
12 A								
13 A								
15 A								
16 A								
17 A								
18 A								
20 A								