




# 61SG

Fuse-links 61SG  
 Miniature Ceramic Fuse 6.35x31.75mm  
 Slow Blow(Time Lag)  
 T-125V/250V


Standards and approvals  
 UL-248



pluggable into miniature fuse-holder or directly mountable on printed circuit boards

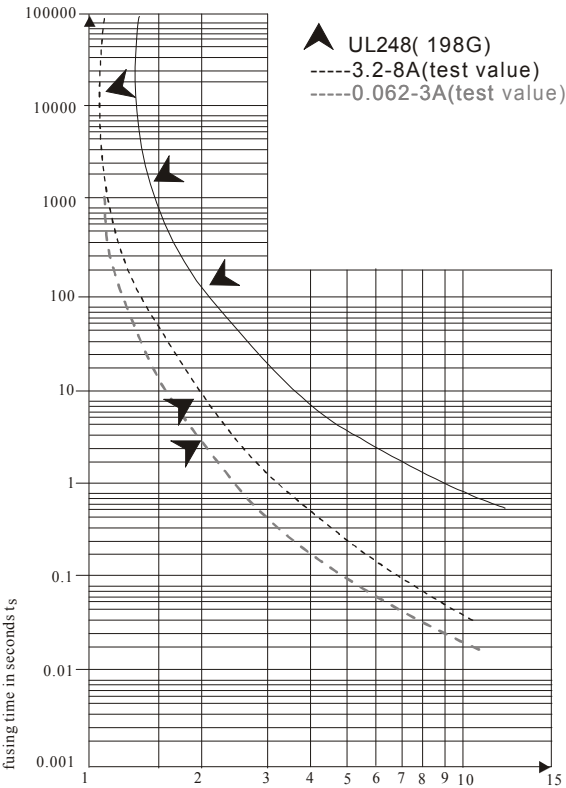

## TYPE DIMENSION

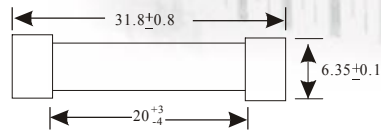

## Time current characteristics

Rat. current I <sub>n</sub>	1.1xI <sub>n</sub>		1.35xI <sub>n</sub>		2.0xI <sub>n</sub>	
	min.	max.	min.	max.	min.	max.
≤A	4h			1h	5s	120s
>3A	4h			1h	12s	120s

Order No.  
 Type:61SG

TYPE	LEAD WIRE	FORMING PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV	Fusing I <sup>2</sup> T at 10 x I <sub>n</sub> A <sup>2</sup> S	BREAKING CAPACITY	APPROVAL
61SG	L	P:xx, L:xx	100mA	125V/250V	2500	0.038	125Vac 10KA 250Vac 200A	CUL
			125mA		2200	0.064		
			150mA		2000	0.11		
			175mA		1600	0.15		
			187mA		1500	0.18		
			200mA		1400	0.21		
			250mA		1100	0.38		
			300mA		1000	0.56		
			375mA		750	1.1		
			400mA		700	1.2		
			500mA		650	2.1		
			600mA		600	3.3		
			700mA		550	4.9		
			750mA		500	5.8		
			800mA		465	6.8		
			1 A		400	12		
			1.2 A		370	19		
			1.25 A		350	21		
			1.5 A		320	33		
			1.6 A		300	38		
			1.8 A		290	53		
			2 A		280	68		
			2.25 A		270	90		
			2.5 A		260	120		
			2.8 A		250	160		
			3 A		235	190		
3.2 A	225	230						
4 A	215	380						
5 A	195	680						
6.25 A	170	1200						
7 A	150	1500						
8 A	140	1500						
10 A	120	1600						
20 A								